


長尺U字溝用グレーチング(茨城県型)

輪荷重 縦断	T-25	輪荷重 縦断	T-14	CAD data	DWG SFC
-----------	-------------	-----------	-------------	-------------	------------

※側溝本体は長尺U字溝(P.158)、深溝U字溝(P.159)を使用してください。

グレーチング細目対応

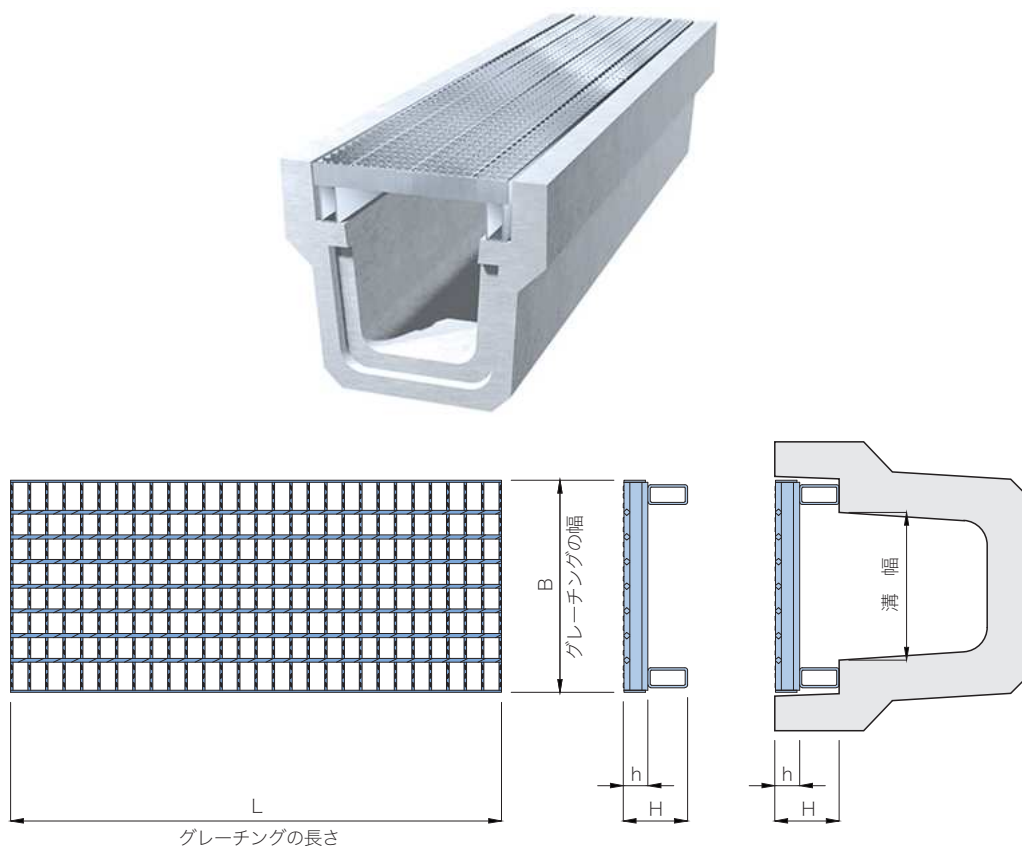

種類	溝幅	県型式		並目 嵩上げグレーチング					細目 嵩上げグレーチング				
				寸法 (mm)				質量 (kg)	寸法 (mm)				質量 (kg)
				B	L	H	h		B	L	H	h	
車道用 (T-25)	250	IH0-250	1.0m	370	995	100	44	28.5	370	995	100	32	36.2
			0.5m		485			14.2		500			18.3
	300	IH0-1	1.0m	430	995	130	50	41.1	430	995	130	44	51.2
			0.5m		501			21.0		500			25.8
	350	IH0-2	1.0m	480	995		60	48.4	480	995		50	78.7
			0.5m		501			24.2		500			39.3
	400	IH0-3	1.0m	530	995		65	55.6	530	995			86.3
			0.5m		501			28.5		500			43.7
	450	IH0-4	1.0m	580	995	150	75	68.3	580	995	150		98.8
			0.5m		501			35.0		501			50.0
	500	IH0-5	1.0m	630	995		90	94.0	630	995		55	113.2
			0.5m		501			47.7		501			57.3
歩道用 (T-14)	250	IH2-250	1.0m	370	995	100	38	26.8	370	995	100	25	31.6
			0.5m		485			13.2		500			16.0
	300	IH2-1	1.0m	430	995		44	31.5	430	995		32	40.2
			0.5m		485			15.6		500			20.3
	350	IH2-2	1.0m	480	995		50	42.6	480	995		38	49.3
			0.5m		501			21.8		500			24.9
	400	IH2-3	1.0m	530	995			45.6	530	995			53.3
			0.5m		501			23.3		500			26.9
	450	IH2-4	1.0m	580	995	120	55	53.0	580	995	120	44	65.9
			0.5m		501			27.2		501			33.3
	500	IH2-5	1.0m	630	995		60	60.3	630	995		50	99.7
			0.5m		501			30.9		501			50.5