
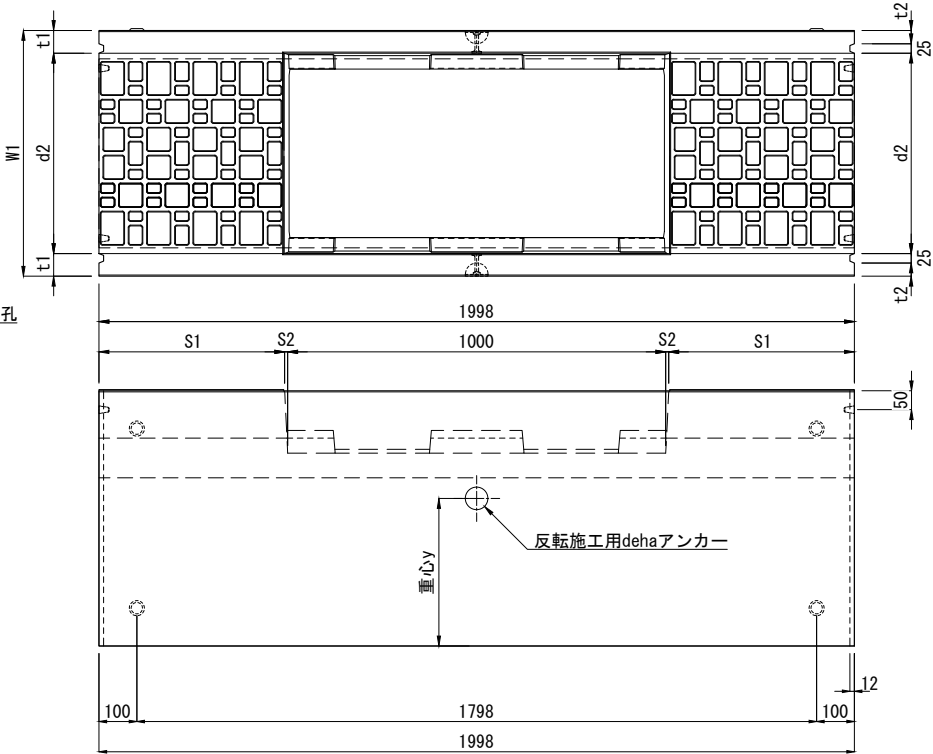
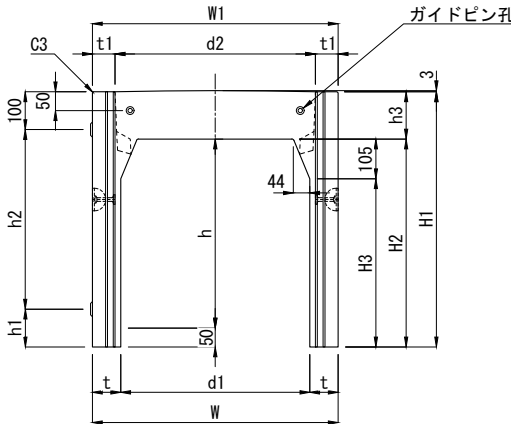


アイドレーン側溝

単位：mm

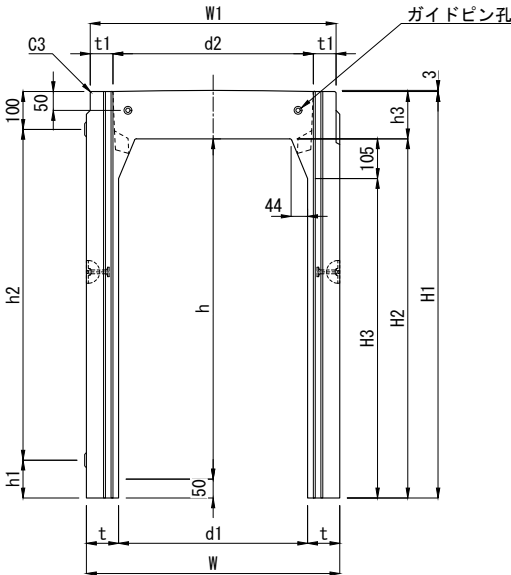




呼び名	寸 法 (mm)																重心 y (mm)	参考質量 (kg)	dehaアンカー
	H1	H2	H3	h	h1	h2	h3	d1	d2	W	W1	t	t1	t2	S1	S2			
500 × 500	675	550	445	500	100	475	125	500	530	650	650	75	60	35	491	8	390	635	1-1. 3t-L55
× 600	775	650	545	600	200												446	710	
× 700	875	750	645	700	300												500	780	
× 800	975	850	745	800	400												554	850	
× 900	1075	950	845	900	100	875				670		85					598	1015	1-1. 3t-L65
× 1000	1175	1050	945	1000	200												650	1095	
× 1100	1275	1150	1050	1100	300												703	1175	
× 1200	1375	1250	1145	1200	100	1175				690		95					747	1375	
× 1300	1475	1350	1245	1300	200												798	1470	1-1. 3t-L55
× 1400	1575	1450	1345	1400	300												850	1550	
600 × 600	790	650	545	600	100	590	140	600	630	760	760	80	65	40	489	10	390	800	
× 700	890	750	645	700	200												516	875	
× 800	990	850	745	800	300												571	950	2-2. 5t-L65
× 900	1090	950	845	900	400												625	1025	
× 1000	1190	1050	945	1000	100	990				780		90					700	1205	
× 1100	1290	1150	1045	1100	200												723	1290	
× 1200	1390	1250	1145	1200	300												775	1375	2-2. 5t-L65
× 1300	1490	1350	1245	1300	100	1290				800		100					818	1595	
× 1400	1590	1450	1345	1400	200												870	1685	
× 1500	1690	1550	1445	1500	300												922	1780	

製品名	アイドレーン側溝			図面番号	
規 格	T-25縦断 500×500～600×1500 (湾曲模様付)			TOYO	
製 図	E2019. 08. 22	R2022. 06. 21	縮尺 1/20		


東洋コンクリート工業株式会社

アイドレーン側溝 端部

単位：mm

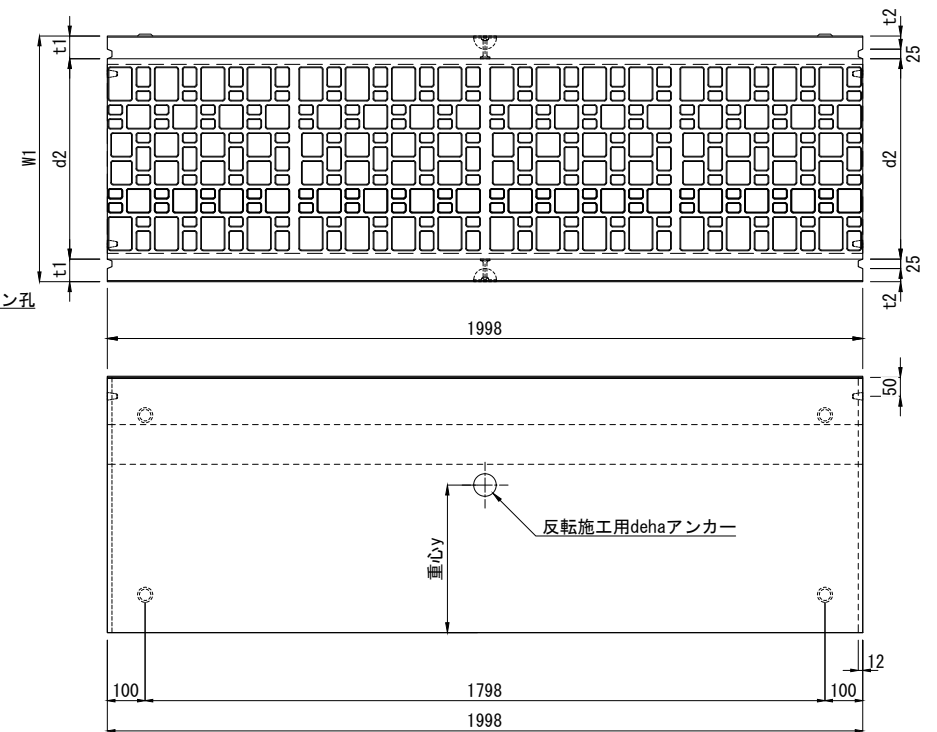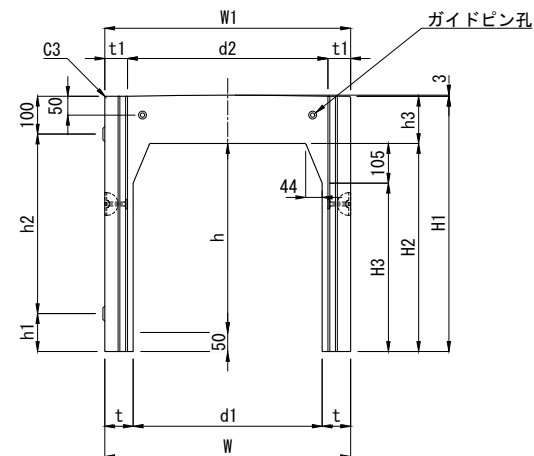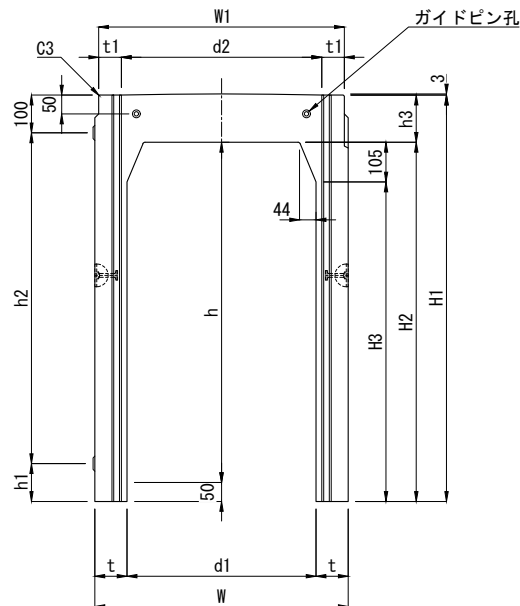


呼び名	寸 法 (mm)														重心	参考質量(kg)		deha7カー										
	H1	H2	H3	h	h1	h2	h3	d1	d2	W	W1	t	t1	t2	y (mm)	1.0m	2.0m											
500 × 500	675	550	445	500	100	475	125	500	530	650	650	75	60	35	390	397	795	1-1.3t-L5										
× 600	775	650	545	600	200										446	432	865											
× 700	875	750	645	700	300										500	468	935											
× 800	975	850	745	800	400										554	503	1010											
× 900	1075	950	845	900	100	875				670					598	586	1175	1-1.3t-L6										
× 1000	1175	1050	945	1000	200										650	626	1255											
× 1100	1275	1150	1050	1100	300										703	666	1335											
× 1200	1375	1250	1145	1200	100										747	767	1540											
× 1300	1475	1350	1245	1300	200	1175					690		95		798	812	1625											
× 1400	1575	1450	1345	1400	300										850	856	1715											
600 × 600	790	650	545	600	100										590	140	600		630	760	760	80	65	40	390	507	1015	1-1.3t-L5
× 700	890	750	645	700	200																				516	545	1090	
× 800	990	850	745	800	300	571	582	1165																				
× 900	1090	950	845	900	400	625	620	1240																				
× 1000	1190	1050	945	1000	100	990				780					700	710	1420	2-2.5t-L6										
× 1100	1290	1150	1045	1100	200										723	752	1505											
× 1200	1390	1250	1145	1200	300										775	795	1590											
× 1300	1490	1350	1245	1300	100										1290				800		100			818	904	1810		
× 1400	1590	1450	1345	1400	200	870	951	1905																				
× 1500	1690	1550	1445	1500	300	922	998	2000																				




製品名	アイドレーン側溝 端部				図面番号	
規 格	T-25縦断 500×500~600×1500(湾曲模様付)					
製 図	E2019.08.22	R2022.06.21	縮尺	1/20		東洋コンクリート工業株式会社

単位：mm

アイドレーン側溝 敷板

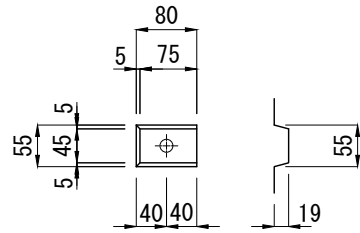


ジョイント部詳細図

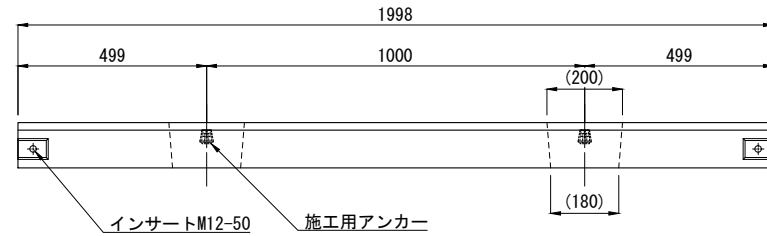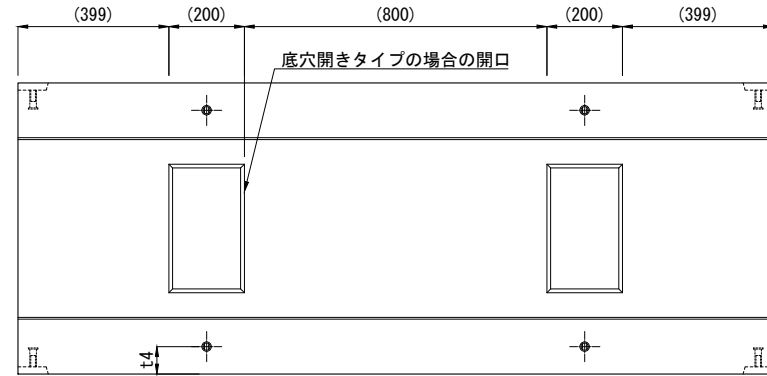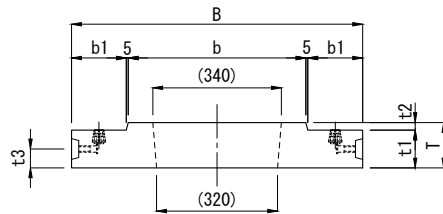

呼び名	寸 法 (mm)								参考質量 (kg)	
	B	b	b1	T	t1	t2	t3	t4	L=1998	L=998
500 標準	770	470	145	120	100	20	50	72.5	406	203
500 底穴開									370	185
600 標準	880	570	150	140	120	20	60	75	550	275
600 底穴開									508	254

注 (1) 寸法の () は底穴開きの場合の寸法です。

(2) こちらの製品につきましては型枠を整備中ですので、あらかじめ担当営業にお問い合わせください。

製品名	アイドレーン側溝 敷板				図面番号	
規 格	500・600					
製 図	E2021. 08. 19	E2024. 11. 27	縮尺	1/20		東洋コンクリート工業株式会社