




箱型U字側溝 集水枳

輪荷重 縦断 **T-25** CAD data DWG SFC


グレーチング細目対応




グレーチング 110°開閉式
(片側ボルト固定)

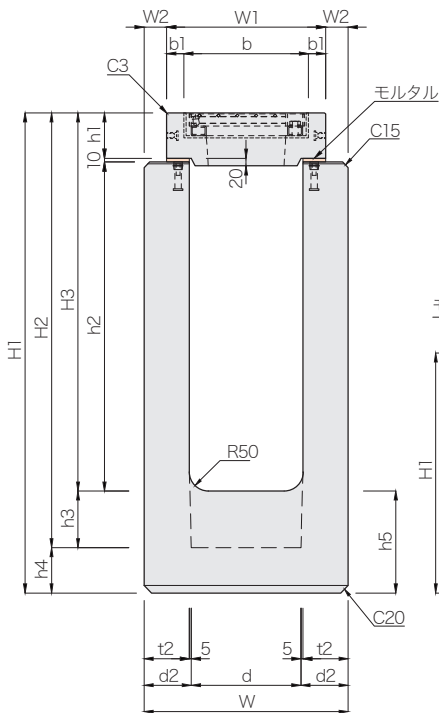

300×900・1000

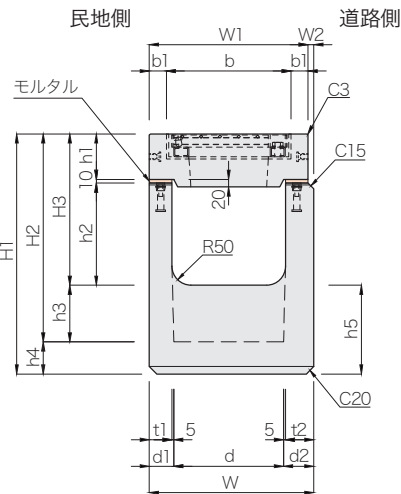

250×250～500×700
(300×900・1000 を除く)

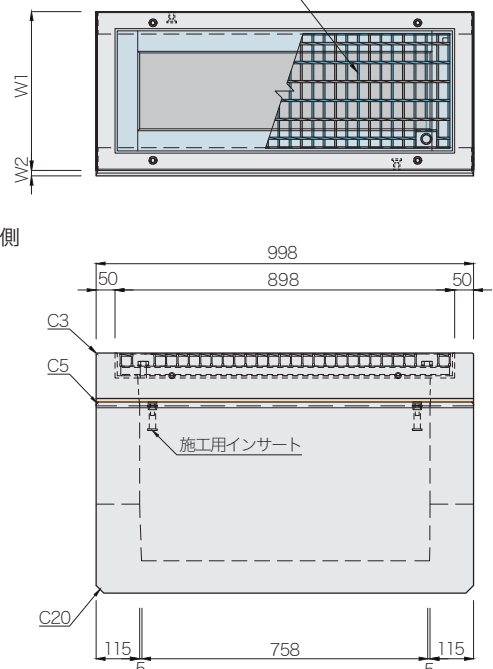

	呼び名 (幅×深さ)	寸 法 (mm)																	参考質量(kg)			施工用 インサート	
		W	W1	W2	H1	H2	H3	h1	h2	h3	h4	h5	b	b1	d	d1	d2	t1	t2	上部桧	下部桧		合計
☆ ☆ ☆ ☆ ☆ ☆ ☆ ☆ ☆ ☆ ☆ ☆ ☆ ☆ ☆ ☆ ☆ ☆	250× 250	385	370	15	580	495	345	120	215	150	85	235	280	45	240	65	80	60	75	84	215	299	M12-55
	× 300				630	545	395		265												231	315	
	× 400				730	645	495		365												263	347	
	300× 300	435	420	15	635	550	400	120	270	150	85	235	330	45	290	65	80	60	75	90	248	338	M12-55
	× 400				735	650	500		370												279	369	
	× 500				835	750	600		470												311	401	
	× 600	460		40	950	850	700		570		100	250					105		100		406	496	
	× 700				1050	950	800		670												444	534	
	× 800				1150	1050	900		770												482	572	
	× 900	540		60	1270	1150	1000		870		120	270				—	125	—	120		755	845	
	× 1000				1370	1250	1100		970												812	902	
	400× 400	545	530	15	750	665	515	140	365	150	85	235	430	50	390	70	85	65	80	124	320	444	M12-55
	× 500				850	765	615		465												354	478	
	× 600	560		30	965	865	715		565		100	250					100		95		437	561	
	× 700				1065	965	815		665													474	598
	× 800	580		50	1185	1065	915		765		120	270					120		115		585	709	M12-75
	× 900				1285	1165	1015		865												627	751	
	× 1000				1385	1265	1115		965												670	794	
500× 500	665	650	15	880	780	630	160	460	150	100	250	530	60	490	80	95	75	90	176	437	613		
× 600				980	880	730		560												477	653		
× 700	675		25	1090	980	830		660		110	260					105		100		553	729		

注(1) ☆印につきましては型枠を整備中ですので、あらかじめ担当営業にお問い合わせください。
(2) グレーチングは細目仕様にも変更できます。