## 都市型側溝 アングルタイプ H50/70



948 1014


1079

1145

200

#### 参考布設標準構造図(路肩部)

### 参考布設標準構造図(中央分離帯部)

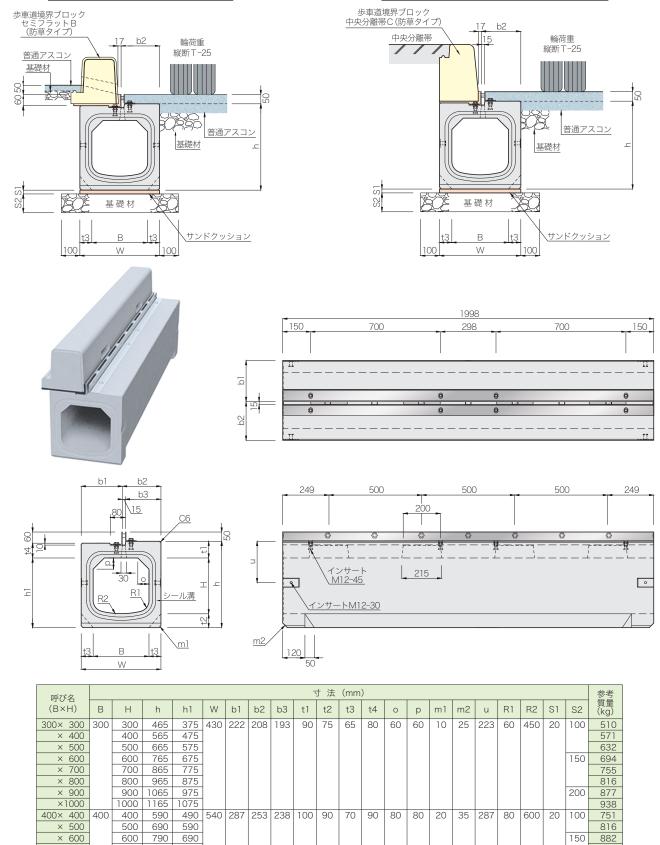

注(1)こちらの製品につきましては型枠を整備中ですので、あらかじめ担当営業にお問い合わせください。

790

890

990

× 700

× 800

× 900

×1000

700

800

900

890

990

1090

1000 1190 1090


<sup>(2)</sup>参考質量はアングル(H50/70)の質量を含んでおりません。

# 都市型側溝 集水桝 アングルタイプ H50/70




グレーチング細目対応





### 布設標準構造図(参考)

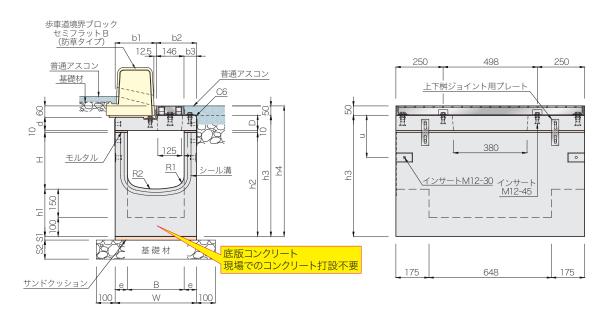

呼び名		寸 法 (mm)															参考質量(kg)					
(B×H)	В	Н	hl	h2	h3	h4	W	b1	b2	b3	D	d	е	u	а	R1	R2	S1	S2	上部桝	下部桝	合計
300× 300	300	300	250	550	640	690	430	217.5	212.5	66.5	80	70	65	223	8	60	450	20	100	80	277	357
× 400		400		650	740	790															308	388
× 500		500		750	840	890															338	418
× 600		600		850	940	990													150		369	449
× 700		700		950	1040	1090															400	480
400× 400	400	400	250	650	750	800	540	282.5	257.5	111.5	90	80	70	287	48	80	600	20	100	111	362	473
× 500		500		750	850	900															395	506
× 600		600		850	950	1000													150		428	539
× 700		700		950	1050	1100															461	572
× 800		800		1050	1150	1200															494	605


注(1) こちらの製品につきましては型枠を整備中ですので、あらかじめ担当営業にお問い合わせください。 (2) グレーチングはボルト固定式となります。また、細目仕様にも変更できます。

## 都市型側溝 深型集水桝 アングルタイプ H50/70



300型

### 布設標準構造図(参考)

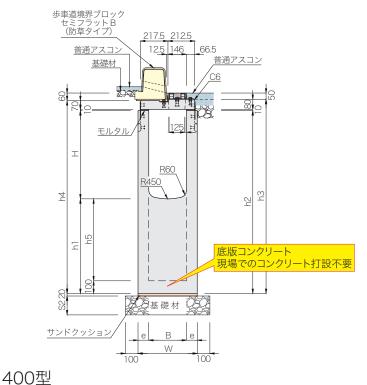

グレーチング細目対応 998 155 688 155 インサート M12-45  $\geq$ 430 インサート <u>M16</u>-55 ボルト固定式グレーチング 250 上下桝 <u>ジョイント用プレート</u> 50 θ インサート M12-45 インサート M12-30 ЬЗ 648


(注)グレーチングはボルト固定式となります。 また、細目仕様にも変更できます。


688

-----インサート <u>M12-45</u> 155

155

# 布設標準構造図(参考)

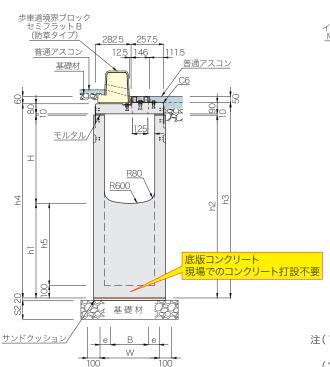

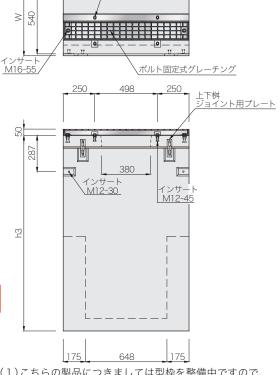

- 注(1) こちらの製品につきましては型枠を整備中ですので、あらかじめ担当営業にお問い合わせください。
  - (2)グレーチングはボルト固定式となります。また、細目 仕様にも変更できます。

# 都市型側溝 深型集水桝 アングルタイプ H50/70



#### 300型 寸法表

#### 400型 寸法表

1	寸 法 (mm)						参考質量(kg)				呼び名				寸	参考質量(kg)							
12)	hl	h3	h4	h5	W	е	S2	上部桝	下部桝	合 計		(B×H-h	2)	hl	h3	h4	h5	W	е	S2	上部桝	下部桝	合 計
650	350	740	730	250	470	85	150	80	394	474		400× 400	750		850	840		570	85	150	111	480	591
																							664
													_										736
																				000			809
							200													200			882
							200																955 1027
																							1100
	_											400× 500						570	85	150	111		631
	_	_	_		470	85	150	80				10011 000	_		_			010	00	, , ,			704
850	450	940	930	350					498	578			1050				450					665	776
950	550	1040	1030	450					563	643			1150	650	1250	1240	550			200		738	849
1050			1130	550					627	707			1250	750			650					811	922
1150				650			200		693	773			1350				750					884	995
													_										1067
												400× 600						570	85	150	111		671
					470	0.5	150	00												200			744
			_		4/0	85	150	80												200			816
																							889 962
							200																1035
												400× 700						570	85	150	111		711
				750					796	876		100 100	_				350		- 00	200		673	784
1450	950	1540	1530	850					860	940			1250	550	1350	1340	450					745	856
950	350	1040	1030	250	470	85	150	80	513	593			1350	650	1450	1440	550					818	929
1050				350					577	657			1450				650					891	1002
1150				450			200		642	722		400× 800						570	85	200	111	640	751
													_										824
																							896
					470	O.F.	150	00				4001/ 000						000	100	200	111		969
					4/0	80	$\overline{}$	80				400× 900						UUO	100	200	111		798 878
							200																958
																							1038
			_									400×1000						600	100	200	111		845
					470	85	150	80		609		100 1000	_				250		100			814	925
1150	350	1240	1230	250			200		593	673			1450	450	1550	1540	350					894	1005
1250	450	1340	1330	350					658	738													
1350				450					722	802													
1450				550					787	867													
1150					470	85	200	80	569	649													
	_		_																				
					470	05	200	90															
	150   150	12)	2)	12	12)	12	12	120	No.   No.	Name	No.   No.	No.   No.	12	12	1	22	12	12	22	22	22	12	12

<sup>1450 450 1540 1530</sup> 738 818 注(1)グレーチングはボルト固定式です。また、細目仕様にも変更できます。

85

150 470

250 1340 1330

1350 350 1440 1430 250

300×1000 1250

80

673

689

753

<sup>(2)</sup>こちらの製品につきましては型枠を整備中ですので、あらかじめ担当営業にお問い合わせください。